



GrilleGuy.com, LLC

Pathfinder Grille Installation Instructions



1. The finished product will look like the picture shown here.




2. Tools required to do this install. A Phillips and flat head screwdriver. A pair of diagonal cutters could also be used.



3. Using the flat head screwdriver, turn the four quick-lock screws $\frac{1}{2}$ turn to release the grille. These are located at the four corners of the grille and can be accessed through the front of the grill, between the fins.



GrilleGuy.com, LLC

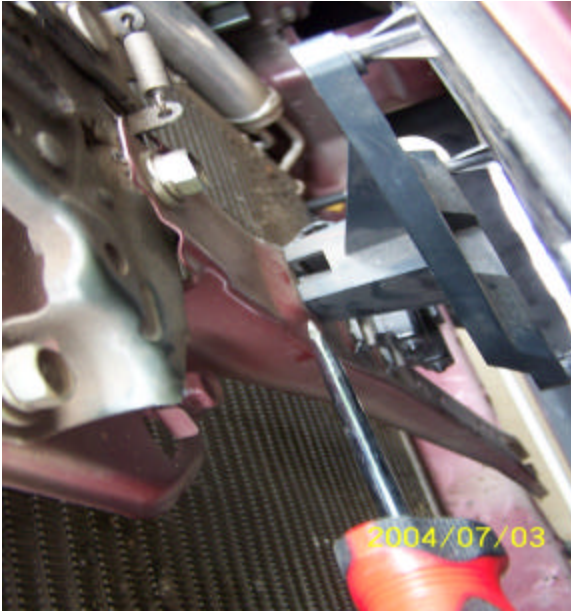

4. Release the quick release using the flat head screwdriver. This is located in the center of the grille, just in front of the radiator.



5. A clip is located on each side of the grille, just below the head lamps and can be released using the flat head screwdriver. Be careful not to break these clips.



6. With the grille off of the vehicle, attach the upper grille sections to the grille, using the tie wraps provided. At this time also insert the lower grille section into the vehicle behind the lower opening and attach with the tie wraps provided. Then reinstall the upper grill using the reverse procedure as before.