

www.GrilleGuy.com
2004 Mazda Miata MazdaSpeed



Step 1

Remove the tie downs or “fangs” as some Miata enthusiast call them. This is done through the front opening (luckily for you MazdaSpeed owners). You will need a 14mm socket and a ratchet. There are three bolts holding each of the fangs in place. While you are in here loosen the two bolts that will attach the grille (see Step 3). Do not remove them just loosen them!



Step 2

You do NOT want to scratch your new paint so wrap the grille with an old rag before trying to slide it into the opening. Lean the grille and insert one end first and then the second.




Step 3

Now slide the slots in the grille under the washer and bolt head, on the left and right side. Tighten the bolts.



Step 5

It should now look like this. And if you like it, then leave it! The next step will pull the bottom half of the grille forward to close off the opening. The grille will be flush to the back portion of the front opening.

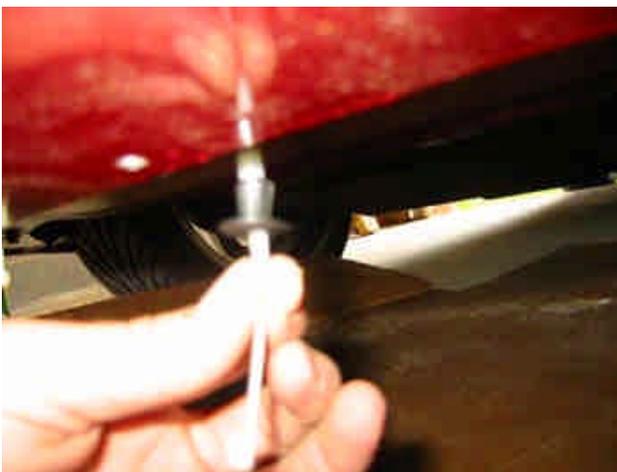

Step 6

Underneath the chin spoiler, you will notice 3 push-in fasteners. There is a center plug and an expanding insert. You need to take the center plug out and put in a safe place (we won't be using them). You may have to push them out from the inside. The photo show the expanding insert also removed. Run the tie wrap up through the expanding insert and through the closest hole in the grille and back down through the hole. (If required two tie wraps may need to be used to in tandem.) Once the tie wrap is back out you can run it through the block, do not tighten it until the other two have been started. Once all three are started you can slowly start to tighten them a little at a time so the bottom of the grille is pulled forward. Cut off any excess from the tie wrap



YOU ARE DONE!