



GrilleGuy.com, LLC

2005 – 2006 Legacy GT, Outback Grille Install Instructions



BEFORE



AFTER

Package Contents:

1 Grille
6 Nylon tie wraps
designated length of edging material

Tools Required (grille installation only):

Wire cutters
Phillips head screwdriver
Hacksaw blade or dremel tool (hacksaw blade works better – less melting)

It is suggested that you use GOOP to hold the mounting tabs for long term.

Note:

GrilleGuy.com, LLC was only granted access to an OEM grille that was removed by the customer and shipped to our location. For this reason, we cannot provide detailed information on how to remove and reinstall the OEM grille or the Subaru emblem. We suggest visiting the LegacyGT forum (www.LegacyGT.com) if you feel you need detailed information.

Our grille instructions will follow on the next pages. We assume you have removed the grille from the car and the Subaru emblem from the grille.



GrilleGuy.com, LLC



1. Remove the Chrome "wings" using a Phillips head screwdriver. These will not be reused.

2. Using a hacksaw blade, a dremel tool, or other cutting device – remove the raised emblem mount. Be sure not to cut the web that connects to the bottom of the grille, this would weaken the grille frame.



3. We found it much easier to cut one side at a time, We did the top then the bottom.

4. You can use some sandpaper afterwards to knock off any debris and smooth the edges; however, it is not a necessary step.



5. The grille is mounted to the OEM grille via the 4 nylon tie wraps. I placed 1 at each end (right at the angle) and then 2 in the center 1 at the bottom and 1 at the top. If you look very closely, you can see 3 of them in this photo. The tie wraps simply loop around the wing and or vertical fins. Do NOT over tighten the tie wraps. Also

place them in holes that are closest to the edging so that they blend into the trim. The grille can now be reinstalled in the vehicle unless installing lower grille.



GrilleGuy.com, LLC

LOWER GRILLE



The grilles shown to the left are for the lower grille (only one is needed) and they are shown with the TOP UP.


1. With the upper OEM grille still removed you can look down into the engine compartment and you will want to install the mounting tabs in the lower area and then others in the upper area (see photo below)



Place 4 mounts on the top of the structural bumper. Again use GOOP to hold these on for best longevity.



GrilleGuy.com, LLC

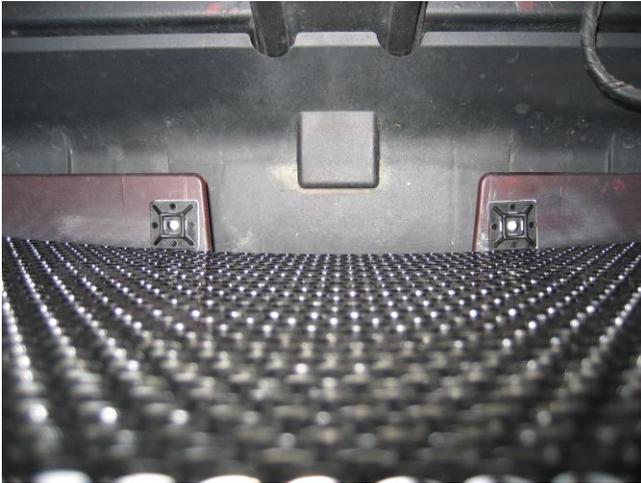

Use 4 more mounts on the bottom of the engine compartment again using GOOP will insure long lasting hold.



Slide the grille into place and secure the grille to the mounts using the zip ties provided. Tighten only to the point that the grille is secure, no need to over tighten.