



GrilleGuy.com, LLC

2007 – 2010 Jeep Wrangler / Rubicon Grille Install Instructions



Tools Required:

Phillips blade screwdriver

Diagonal cutters


Required Time: allow 10-20 minutes to

Kit includes: Grille, 12 zip ties and mounts



Step 1

Open the hood then using the Phillips screwdriver, remove the plastic inserts by unscrewing and then pulling them out carefully. Be sure not to lose them!

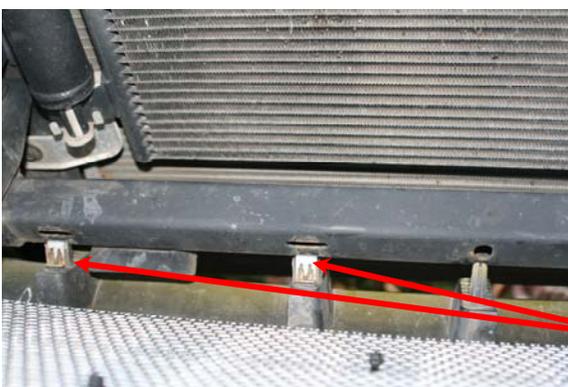

Step 2

The grille now needs to be removed by pulling at the locations where there are metal clips. Three are located along the bottom frame below the radiator and then one under each of the head lamps. Just pull straight forward with a wide grip so as to not crack the plastic grille.



GrilleGuy.com, LLC



Step 2a

this photo simply shows one of the two metal tabs found under the lamp. Again pull with your hands supporting near weach of the tabs but spread enough so as to disperse the force.



Step 3

Remove the turn signal lamps by twisting the holder and then sliding out. The grille can now be removed and carried to a safe work area (preferably on a soft towel). Place the grille face down as you will need work from the backside.



Step 4

You will use the 12 mounts to attach the grille to the OEM grille. Before applying the mounts the surface should be cleaned with some alcohol or other cleaner and then thoroughly dried to allow maximum adhesion. Using an additional adhesive such as GOOP could also be applied to insure greater adhesion. We simply cleaned the surface with isopropyl alcohol and then after dry applied the mounts. The mounts need to be spaced out evenly among the area. Be sure to have even spread all the way to the edges. You can see in the images that we used a 1,2,1,2,2,1,2,1 pattern. Once they are secured you will need to lay the grille over the area and be sure to cover the openings. Also note that the material has a front and a back (the smooth side is the front). You will need to insert the zip ties and then lifting the grille insert through the loop and then back through the grille. DO NOT SNUG the ties until all have been started. Then work in one direction tightening the zip ties while making



GrilleGuy.com, LLC

sure the grille still covers all of the opening and is square (you don't want it to look uneven).



Step 5

Once the grille is securely mounted and all of the ties are cinched up tight (not too tight as they could pull the mounts off!) then clip off the excess. The grille is now ready to be mounted. You should insert the turn signal lamps and then push the grille aligning the metal inserts with the mounting holes and then insert the plastic push-in fasteners. Congrats the installation is complete!

