



GrilleGuy.com, LLC

Lower Grille Install Instructions



Kit Contents:


Lower Grille with vinyl trim
5 UV Resistant Zip Ties

Tools Required:

Diagonal cutters – something to trim zip ties



Start by routing the Zip ties through the grille from the back through a hole near the edge (close to the trim) and then back through an adjacent hole. This will allow you to tighten the grille from the front of the vehicle (no need to remove the OEM upper grille). You will do this in 5 places as indicated by the yellow arrows in the first picture.

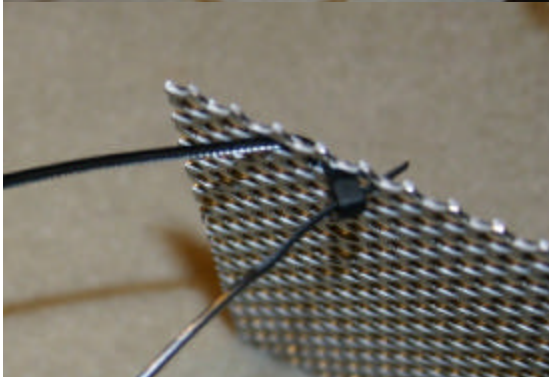

The grille is then placed on the vehicle and the zip ties routed around the horizontal fins of the OEM grille and then back through the head of the zip tie and out through the front of the grille. Do all 5 zip ties like this before tightening any of them up. Once all have been started, position the grille in the opening and tighten all the zip ties. DO NOT overtighten! Trim off any excess zip tie and then push the end back into the hole from which it was coming out.