

## GrilleGuy.com Accord 4 Door Grille Kit Installation

Kit has 6 zipties (black) and two Grilles


Tools: needle nose pliers with cutters

Note: Reference to wire is old, we use only tie wraps now. Wire can be purchased at a local Hardware store (picture hanging wire, galvanized)



Start with the lower grille. Test the fit and then start at one end and mark either with the wire or with a pencil (or grease pen) the hole that is just above even with the horizontal cross bar of the OEM grille. Do this in at least three locations across the front (Center and ends).

You may find it easier to remove the plastic under carriage for the next steps (Not Required). Place the wire through the holes you marked and then place grill back on the car.

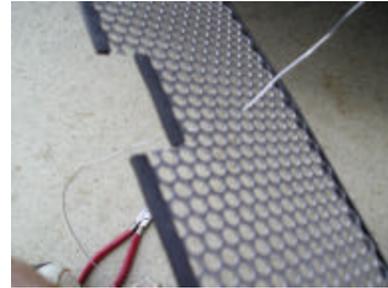

Work from one end and wrap the wire around the horizontal bar and push it back through the hole vertically adjacent (1 above or 1 below). Twist loosely at this point.

When all are done use needle nose to twist the wire ties to make the grille snug. Cut the end off of the wire ties and then gently push the twisted through the lower hole so it is out of sight. This step not required if you remove under carriage as the twist ends will be on the inside behind grille.



Lets move to the upper grille now so release your hood latch and raise the hood up so we can test the fitment and the bend of the grille. Some tweaking may be necessary for this bend angle. It bends easy so gently bend it to make the angle. The top of the grill should be touching just below the hood latch and the grill should be bent toward the front of the vehicle so it touches the back of the center bar. The top has a notch for hood latch , so you know the top.



On the center horizontal bar find the slots (marked by the ⊗) in your bumper as indicated with these white zipties. The ziptie will need to be fed from the top of this slot and then feed into the correct hole on the grill. (approx 11 and 13<sup>th</sup> hole down on grill)

Loosely install both the left and right zip ties. DO NOT TIGHTEN until both have been installed since you must have them loose to access the rear of the grill for the 2<sup>nd</sup> ziptie.



Notice that you need clearance for your hood release latch to get over the grille otherwise you won't be able to open your grille once the hood is shut. This adds a bit of security. Notice we have cut out some to fit under this latch. The rubber trim is to protect your hands from nicks.



Tighten both the wireties so that the grill is snug against the center bar. The top of the grill should press against the hood mechanism as shown above if bend angle is correct. Cut the end of the zipties.



FINISHED. Step back and take a look. Now you can differentiate your Accord from the others on the road. Clean the Grille as you would wash the rest of your car.