




GrilleGuy.com, LLC

## Jeep Cherokee Sport Install Instructions

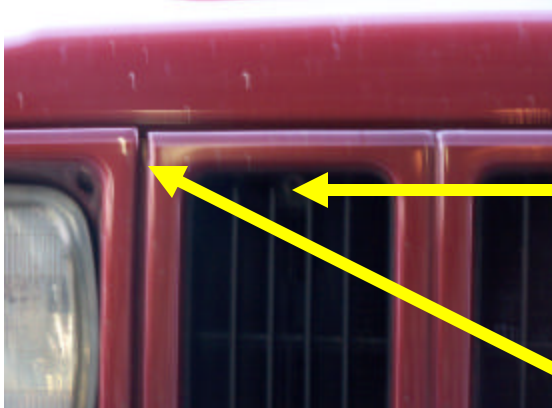

**Tools required:** Wire cutters or Scissors, a Phillips head screwdriver, and a pair of gloves are suggested

**Step 1:** Remove the 5 screws holding the center of the grille in place. Once removed, the grille can be removed. The edges are behind the headlight trim.




**Step 2:** Your vehicle now looks like this, look at the beating your radiator has taken. Now is a good time to clean up the front end of all the dirt you have accumulated over the years.



**Step 3:** Slide the grille in from the right and all the way to the left so the right end can be put in without bending the material. Be careful not to scratch the vehicle.



GrilleGuy.com, LLC

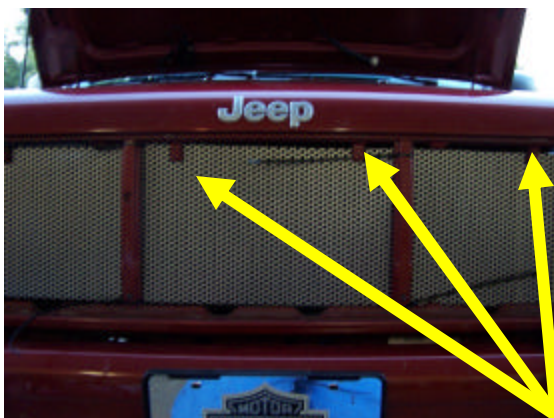

**Step 4:** Put the tie wraps through the aluminum and around the posts. If needed you may want to mark where you want your tie wraps (using a pencil, dry erase marker, or tape) and then remove the grille and preset your tie wraps since access to the back is very limited. Tie wrap heads must not be on the front side of the posts. Note tabs are in front of the grille. Cut off excess tie wraps



**Step 5:** Reinstall the OEM Grille one end at a time with a slight bow in the middle to get the second end behind the headlight trim. Then replace all 5 screws.



**You're done!** Go hit the streets with your new grille. To wash just use normal car wash detergent. If you wish to polish visit our website @ [www.GrilleGuy.com](http://www.GrilleGuy.com) and then see our tips and tricks page for details.

www.GrilleGuy.com, LLC